

BT-860

Bluetooth Stereo Headset

User's Manual

Brief introduction	5
1. Bluetooth wireless communication technology.....	5
2. About BT-860.....	5
Before using	7
1. Overview	7
2. Charging the headset	8
Usage Guide	9
1. Switching on / off headset	9
2. Pairing the headset with Bluetooth devices	10
How to enter pairing mode.....	10
Pairing the headset with a Bluetooth mobile phone	10
Pairing the headset with a Bluetooth transmitter	11
Multi-pair	12
3. Re-connecting to a Bluetooth device	13
4. Switching off LED indicator.....	14
5. Wearing the headset	15
6. Making a call with the headset	16
7. Playing music.....	17
8. LED indicator.....	18
9. Indication tone	19
Care and maintenance	20
FAQs	20
Specifications	22

FCC Compliance Statement



Hereby, Nuforce Inc. declares that this device is in compliance with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment uses and can radiate radio frequency energy. If not installed and operated in accordance with the instructions, it may interfere with radio communications.

There is no guarantee that interference will not occur in a particular installation. If this equipment does interfere with radio or television reception, the user may be able to correct the problem by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase separation between equipment and receiver.
- Use equipment on a circuit to which the receiver is not connected.
- Consult your dealer or an experienced radio/TV technician for help.

WARNING: Only peripherals complying with the FCC class B limits may be attached to this equipment.

Changes or modifications made to this equipment, not expressly approved by us or parties authorized by us could void the user's authority to operate the equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice for customers: The following information is only applicable to equipment sold in countries applying EU Directives.

EU Declaration of Conformity



Hereby, Nuforce Inc. declares that this device is in compliance with the essential requirements and other relevant provisions of Directive 2004/108/EC.

The manufacturer of this product is NuForce, 382 South Abbott Ave, Milpitas, CA 95035, USA.

The Authorized Representative for EMC and product safety is NuForce, 382 South Abbott Ave, Milpitas, CA 95035, USA.

For any service or guarantee matters please refer to the addresses given in separate service or guarantee documents.

For customers in Europe

Disposal of Old Electrical & Electronic Equipment (Applicable in the European Union and other European countries with separate collection systems)



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local Civic Office, your household waste disposal service or the shop where you purchased the product.

Welcome to the BT-860 Bluetooth Stereo Headset. Please read this manual carefully before use.

Brief introduction

1. Bluetooth wireless communication technology

Bluetooth is a standard of close-range wireless technology used by Ericsson, IBM, Intel, Nokia and Toshiba. With Bluetooth technology, we can achieve the highest transmission rate among cell phones, computers, printers, PDAs and other devices. The max transmission range of class II is 10 meters while the max transmission range of class I can reach up to 100 meters.

2. About BT-860

The BT-860 is a stereo Bluetooth headset. It supports the following Bluetooth profiles:

HSP — Headset Profile

HFP — Hands-free Profile

A2DP — Advanced Audio Distribution Profile

AVRCP — Audio/Video Remote Control Profile

Features:


The BT-860 permits you to enjoy music wirelessly:

- 1) Pairing with a Bluetooth mobile phone or PDA supporting HFP Profile.
 - ◆ Answer, end, or reject a call
 - ◆ Redial last number
 - ◆ Voice dial
 - ◆ Adjust the volume
 - ◆ Call transfer between the headset and your Bluetooth cell phone
 - ◆ Microphone mute
- 2) Pairing with a Bluetooth music device and Bluetooth transmitter supporting A2DP permits you to:
 - ◆ Enjoy music wirelessly
 - ◆ Adjust the volume
 - ◆ Remote control pause/play
 - ◆ Remote control previous/next track
- 3) Easy to switch between the call and music, you will not miss the incoming when you're listening to music.
- 4) Every time the headset is turned on, it will connect to the last connected device automatically.

Note: Even though the paired device and headset support the same Bluetooth profiles, the functions may differ owing to the paired devices' specification difference.

Before using

1. Overview

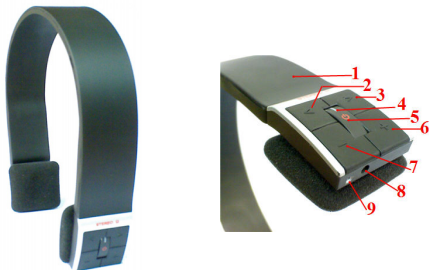

1	Foldable and retractable headband
2	< button: Previous track
3	> button: Next track
4	LED Indicator
5	Multi-function button (MFB): Power on/power off/answer a call/end a call/reject a call/microphone mute/call transfer/play/pause
6	+ button: volume up
7	- button: volume down
8	Charging jack
9	Built-in microphone

2. Charging the headset

The headset comes with a built-in rechargeable battery. Prior to use, it is recommended that you charge the battery fully.

When the headset is at low power, a red LED flashes twice and the headset emits three “dong” tones every 30 seconds. It is necessary to recharge the headset’s battery.

1) Using travel charger

Connect the charger to a standard power outlet and the charger plug to the charging jack of the headset. The red LED is on while charging. It takes about three hours to charge the battery fully. When charging is complete, the red LED will be off.

2) Using USB cable

Connect the USB cable to a computer USB port and the USB cable plug to the charging jack of the headset. The red LED is on while charging. It takes about three hours to charge the battery fully. When charging is complete, red LED will be off.



Warning:

- 1) The battery is recyclable.
- 2) Batteries (battery pack or installed batteries) should not be exposed to excessive heat, such as sunshine, fire or the like.

Usage Guide

1. Switching on / off headset

Function	Operation	LED indicator	Indication tone
Power on	Press the MFB button for 3-5 seconds and release it till the blue LED is on	Blue LED flashes quickly 4 times	A long "DI" tone

Function	Operation	LED indicator	Indication tone
Power off	Press the MFB button for 3-5 seconds and release it till the red LED is on	Red LED flashes quickly 4 times	A long "DI" tone

Remark: In order to save power, the headset will switch off automatically if no device is connected within five minutes.

2. Pairing the headset with Bluetooth devices

How to enter pairing mode

Function	Operation	LED indicator	Indication tone
Enter pairing mode	Make sure that the headset is off. Press and hold MFB button for 7-8 seconds and release when the red and blue LEDs flash alternately	Red and blue LEDs flash alternately.	Two short "DU" tones

Remark: The Pairing Mode will last two minutes. If no devices are connected after two minutes, the standby mode returns automatically.

Pairing the headset with a Bluetooth mobile phone

Prior to using the headset for the first time, you have to pair it with a Bluetooth-enabled mobile phone. The pairing procedures are dependent on different models of mobile phones. Please refer to your mobile phone user's manual for information. The general pairing procedures are as follows:

- 1) Place the headset and Bluetooth mobile phone no more than one meter apart.
- 2) Enter the headset's pairing mode (please refer to "How to enter pairing mode").
- 3) Activate your mobile phone's Bluetooth function and set your mobile phone to search for Bluetooth devices within range, and select "BT-860" from the list of devices shown.

- 4) In response to the indication, enter password or PIN: "0000";
- 5) If prompted by your mobile phone to connect, select "Yes." (This will vary among mobile phone models.)
- 6) After successfully connecting, the blue LED flashes once every eight seconds.

Remarks:

- If pairing fails, switch off the headset and re-pair according to steps one to six above.
- After a successful pairing, the headset and the mobile phone will remember each other and will not need to re-pair next time. The headset can remember eight paired devices. When the number of paired devices exceeds eight, the first one will be replaced.
- Every time the headset is switched on, it will automatically connect to last device. If you wish to pair it with other devices, switch off the Bluetooth function of last connected device and pair the headset with the new device according to steps one to six above.

Pairing the headset with a Bluetooth transmitter

You can connect the headset to a Bluetooth transmitter to enjoy music wirelessly. Take the BTT010 (Bluetooth transmitter for iPod and iPhone, not included) as an example. The pairing steps are as follow:

- 1) Place the headset and the Bluetooth transmitter no more than one meter apart;
- 2) Enter the headset's pairing mode (Refer to "How to enter pairing mode");

- 3) Turn on the Bluetooth transmitter. It will automatically search for Bluetooth devices and send a pairing request;
- 4) When the headset requests a PIN, the transmitter will automatically respond "0000";
- 5) After successful pairing, the headset's blue LED flashes once or twice every eight seconds.



Remarks:

- The the headset's pairing password is "0000". Therefore, the headset can pair only with a Bluetooth transmitter whose pairing password is "0000".
- If pairing fails after several tries, refer to the Bluetooth transmitter's manual for further information.

Multi-pair

The headset can connect with two devices at most: one, a Bluetooth mobile phone supporting HFP profile; the other, a Bluetooth music device supporting A2DP profile. If you wish to complete multi-pairing, refer to the following steps:

- 1) First, pair the headset with a Bluetooth transmitter (refer to "pairing the headset with a Bluetooth transmitter");
- 2) Switch off the Bluetooth transmitter;

- 3) Pair and connect the headset with a Bluetooth mobile phone (refer to "pairing the headset with a Bluetooth mobile phone");
- 4) Switch on the Bluetooth transmitter. It will automatically connect to the headset.

Remarks:

- ❑ After successful multi-pairing, the paired devices will remember each other. They will not need to pair again. If the pairing information is deleted, connect the mobile phone with the headset and turn on the Bluetooth transmitter, thereby achieving multi-connection.
- ❑ For mobile phones supporting both HSP and A2DP, when setting up HSP and A2DP connection with the headset simultaneously, the Bluetooth transmitter may not connect to the headset.

3. Re-connecting to a Bluetooth device

1) Automatic connecting

Every time the headset is switched on, it will automatically connect to last connected device.

2) Manual connecting

When the headset is in standby mode, short press **MFB** button once. It will connect to last connected device.

Remarks:

- The headset tries to connect to a last device supporting HFP profile.
- Before connecting to a Bluetooth device, please turn on the Bluetooth device's Bluetooth function.
- On some Bluetooth devices, e.g., several Nokia mobile phones, you have to allow for automatic connecting in the mobile phone's settings. Refer to your mobile phone's manual for further information.

4. Switching off LED indicator


Press and hold < (Previous track) button and > (Next track) button simultaneously for about five seconds to switch off all LED indicators in order to save power. Repeat procedure to switch on LED indicators.

Remarks:

- When the headset switches between connected and non-connected status, the LED indicator will turn on automatically.
- The LED indicator will turn on automatically when you use the headset again.

5. Wearing the headset

The headset's headband is foldable and retractable. Adjust according to comfort and need. The headset's "L" represents the left ear and "R" the right ear. Adjust the headset as illustrated here.



6. Making a call with the headset

Function	Status of headset	Operation
Voice dial	Standby mode	Press and hold MFB button for two seconds and release when you hear a dictation tone
Redial last number	Standby mode	Short-press the MFB button twice
Volume up	During a call	Short or long press + button
Volume down	During a call	Short or long press – button
Answer a call	Incoming ring	Short press MFB button
Reject a call	Incoming ring	Press and hold MFB button for two seconds, and then release it when you hear the indication tone
End a call	During a call	Short-press MFB button
Call transfer	During a call	Press and hold MFB button for two seconds, and release it when you hear the indication tone
Microphone mute	During a call	Short-press the MFB button twice
Cancel mute	During a call (mute)	Short-press the MFB button twice

Warning: Excessive headphone volume can cause hearing loss.

Remarks:

- ❑ Not all mobile phones support all the functions listed above. Please refer to your mobile phone's manual for further information.
- ❑ Certain functions and indication tones maybe vary with different models of mobile phones.
- ❑ When volume is adjusted to max. or min., you will hear an indication tone.
- ❑ When pressing the answer button on some mobile phones, the call will be transferred to the mobile phone. You will need to switch the call to the headset manually. Refer to your mobile phone's manual for further information.

7. Playing music

When the headset connects to a mobile phone or Bluetooth transmitter supporting A2DP, you can enjoy music with the headset.

Function	Status of headset	Operation
Volume up	Playing music	Short or long press + button
Volume down	Playing music	Short or long press – button
Pause	Playing music	Short press MFB button
Play	Pausing	Short press MFB button
Last track	Playing music	Short press < button
Next track	Playing music	Short press > button

Remarks:

- When playing music on some mobile phones, the music will be transmitted to the mobile phone's speaker instead of the headset. You have to select "transmit the sound via Bluetooth" in the settings menu and then choose "BT-860" as a speaker device. The music will be transmitted to the headset. Refer to your mobile phone's user's manual for further information.
- When volume is adjusted to max. or min., you will hear a indication tone.
- If you want to remotely control previous/next track, pause/play, your Bluetooth mobile phone or Bluetooth transmitter will need to be paired with the headset to support the AVRCP profile. Refer to your mobile phone's manual or Bluetooth transmitter for further information.

8. LED indicator

1) When it is charging

LED indicator	Status of headset
Red LED is on	Charging
Red LED is off	Finish charging

2) When it is pairing with a Bluetooth device

LED Indicator	Status of headset
Red and blue LEDs flash alternately	Pairing mode
Blue LED flashes twice quickly every 2 seconds.	Not connected to a device

LED Indicator	Status of headset
Blue LED flashes once quickly every 8 seconds	Connected to a device
Blue LED flashes twice quickly every 8 seconds	Connected to a device and in apt-X mode
Blue LED flashes quickly	Incoming call
Blue LED flashes once every 2 seconds	During a call
Red LED flashes twice quickly every 20 seconds	Low power

9. Indication tone

Indication tone	Status of headset
Two tones every 5 seconds	During a call and microphone mute
Three "Dong" tones every 30 seconds	Low power

Care and maintenance

Observe the following recommendations to enjoy this product for years to come.

- Do not expose the headset to liquid, moisture or humidity.
- Don't use abrasive cleaning solvents.
- Exposing the headset to temperature extremes shortens its life.
- Don't dispose of the headset in a fire to avoid the risk of explosion.
- Don't bring the headset in contact with sharp objects.
- Dropping the headset may damage its internal circuit.
- Don't attempt to disassemble the headset.

In case of malfunction, return the headset to the store where you bought it. The staff will help you to solve the problem.

FAQs

1) Why does the red LED flash twice every 30 seconds?

The headset is at low power and needs to be recharged.

2) Why isn't the red LED on when charging?

- a) Make sure the charger is firmly connected to the headset;
- b) After a long period of non-use, the battery may have discharged. You must recharge the battery for 30 minutes.

3) What is the effective range between the headset and a Bluetooth mobile phone?

According to the Bluetooth standard, the maximum controllable range of Class II headsets is ten meters. This may vary in different environments.

4) What to do when my mobile phone cannot find the headset?

The cell phone will not find the headset if they are not in a pairing mode. Make sure that the headset is in a pairing mode and within an effective working range.

5) Why can't I hear voices from the headset?

- a) Make sure that the headset is switched on;
- b) Make sure that the headset's volume not too low or muted;
- c) Make sure that the headset is well connected to your mobile phone;
- d) Make sure that the distance between the headset and your mobile phone is withing an effective working range.

6) Why is there no voice when making a call with the headset?

- a) Make sure your mobile phone is in a strong signal area;
- b) Make sure that the headset is within the function range.

7) Why can't I remotely control the pause, play, previous track and next-track functions with the headset when I'm playing music?

The function requires the Bluetooth device to be paired with the headset in order to support AVRCP (Audio/Video Remote Control Profile). Make sure that your cell phone or Bluetooth transmitter supports AVRCP profile.

Specifications

Bluetooth version	Bluetooth V2.1+EDR
Bluetooth profiles	Headset, Hands free, A2DP, AVRCP
Effective range	10 meters
Working time	Music (Normal mode): 10 hours Music(apt-X mode): 5.5 hours Talk: 11 hours
Standby time	Up to 250 hours
Charing input	DC: 5V/130mA
Charging time	Approx. 3 hours
Dimensions	162 × 153.5 × 32 mm
Weight	Approx. 103 g

Remarks:

- 1) This device complies with Part 15 of the FCC Rules. Operation is subject to the following conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- 2) Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NuForce One (1) Year Limited Warranty

NuForce's Limited Warranty and Limitation of Liabilities

ADDITIONAL RIGHTS

FOR CONSUMERS, WHO ARE COVERED BY CONSUMER PROTECTION LAWS OR REGULATIONS IN THEIR COUNTRY OF PURCHASE OR, IF DIFFERENT, THEIR COUNTRY OF RESIDENCE, THE BENEFITS CONFERRED BY THIS WARRANTY ARE IN ADDITION TO ALL RIGHTS AND REMEDIES CONVEYED BY SUCH CONSUMER PROTECTION LAWS AND REGULATIONS. THIS WARRANTY DOES NOT EXCLUDE, LIMIT OR SUSPEND ANY RIGHTS OF CONSUMERS ARISING OUT OF NONCONFORMITY WITH A SALES CONTRACT. SOME COUNTRIES, STATES AND PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES OR ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY OR CONDITION MAY LAST, SO THE LIMITATIONS OR EXCLUSIONS DESCRIBED BELOW MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS THAT VARY BY COUNTRY, STATE OR PROVINCE. THIS LIMITED WARRANTY IS GOVERNED BY AND CONSTRUED UNDER THE LAWS OF THE COUNTRY IN WHICH THE PRODUCT PURCHASE TOOK PLACE.

LIMITED WARRANTY

For a period of ONE(1) YEAR from the date of retail purchase by the original end-user purchaser (“Warranty Period”), NuForce warrants (i) this product against defects in materials and workmanship, and (ii) that each Product, unmodified and under normal use and conditions, will substantially comply with NuForce’ applicable written technical documentation for the Product. NuForce reserves the right to make substitutions and modifications from time to time in the specifications of Products sold by NuForce, provided that such substitutions or modifications do not materially affect overall Product performance.

If a hardware defect exists and a valid claim is received within the Warranty Period, at its option and to the extent permitted by law, Nuforce will (1) repair the hardware defect at no charge, using new or refurbished replacement parts, (2) exchange the product with a product that is new or which has been manufactured from new or serviceable used parts and is at least functionally equivalent to the original product, or (3) refund the purchase price of the product. Nuforce may request that you replace defective parts with user-installable new or refurbished parts that Nuforce provides in fulfillment of its warranty obligation. A replacement product/part assumes the remaining warranty of the original product or ninety (90) days from the date of replacement or repair, whichever provides longer coverage for you. When a product or part is exchanged, any replacement item becomes your property and the replaced item becomes Nuforce's property. When a refund is given, your product becomes Nuforce's property.

OBTAINING WARRANTY SERVICE

If you purchased the product in the U.S., deliver the product, at your expense, to any Nuforce Service Center located in the U.S. If you purchased the product outside of the U.S., deliver the product to any Nuforce Authorized Importer in the country where you purchased the product. Be aware, however, that not all countries have Nuforce Authorized Service Providers ("NASP") and not all Authorized Service Providers outside the country of purchase have all parts or replacement units for the product. If the product cannot be repaired or replaced in the country it is in, it may need to be sent to a different country or returned to the country of purchase at your expense for repair or replacement. If you seek service in a country that is not the country of original purchase, you will comply with all applicable import and export laws and regulations and be responsible for all custom duties, V.A.T. and other associated taxes and charges. Where international service is available, Nuforce may repair or exchange defective products and parts with comparable products and parts that comply with local standards.

You can always deliver the product to NuForce's U.S. main service center for obtaining warranty service, however, you may have to pay for return shipping cost.

Nuforce may send you user-installable new or refurbished replacement product or parts to enable you to service or exchange your own product ("DIY Service"). Upon receipt of the replacement product or part, the original product or part becomes the property of Nuforce and you agree to follow instructions, including, if required, arranging the return of original product or part to Nuforce in a timely manner.

When providing DIY Service requiring the return of the original product or part, Nuforce may require a credit card authorization as security for the retail price of the replacement product or part and applicable shipping costs. If you follow instructions, Nuforce will cancel the credit card authorization, so you will not be charged for the product or part and shipping costs. If you fail to return the replaced product or part as instructed or the replaced product or part is not eligible for warranty service, Nuforce will charge the credit card for the authorized amount.

EXCLUSIONS AND LIMITATIONS

This Limited Warranty applies only to hardware products manufactured by or for Nuforce that can be identified by the "Nuforce" trademark, trade name, or logo affixed to them. The Limited Warranty does not apply to any non-Nuforce hardware products or any accessories, even if packaged or sold with Nuforce hardware. Non-Nuforce manufacturers, suppliers, may provide their own warranties. Other accessories distributed by Nuforce under the Nuforce brand name are not covered under this Limited Warranty. This warranty does not apply: (a) to damage caused by accident, abuse, misuse, misapplication, liquid contact, fire, earthquake, non-Nuforce products, or other external causes; (b) to damage caused by service performed by anyone who is not a NASP; (c) to a product or a part that has been modified without the written permission of Nuforce; (d) to consumable parts, such as batteries, or protective coatings designed to diminish over time unless failure has occurred due to a defect in materials or workmanship; (e) to cosmetic damage, including but not limited to scratches, dents, and broken plastic on ports; (f) to defects caused by normal wear and tear or otherwise due to the normal aging of the product; or (g) if any Nuforce serial number has been removed or defaced.

Important: Do not open the hardware product. Opening the hardware product may cause damage that is not covered by this warranty. Only Nuforce or a NASP should perform service on this hardware product.

THIS WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. NUFORCE SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF NUFORCE CANNOT LAWFULLY DISCLAIM IMPLIED WARRANTIES UNDER THIS LIMITED WARRANTY, ALL SUCH WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. No Nuforce reseller, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

NUFORCE IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DOWNTIME, GOODWILL, DAMAGE TO OR REPLACEMENT OF EQUIPMENT AND PROPERTY, ANY COSTS OF RECOVERING, REPROGRAMMING, OR REPRODUCING ANY PROGRAM OR DATA STORED IN OR USED WITH NUFORCE PRODUCTS, AND ANY FAILURE TO MAINTAIN THE CONFIDENTIALITY OF DATA STORED ON THE PRODUCT. NUFORCE SPECIFICALLY DOES NOT REPRESENT THAT IT WILL BE ABLE TO REPAIR ANY PRODUCT UNDER THIS WARRANTY OR MAKE A PRODUCT EXCHANGE WITHOUT RISK TO OR LOSS OF PROGRAMS OR DATA.

Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages or exclusions or limitations on the duration of implied warranties or conditions, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary by state or province.

Proof of purchase in the form of a bill of sale or receipted invoice which is evidence that the unit is within the Warranty period must be presented to obtain warranty service.

REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE CONSUMER.

NUFORCE SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY ON THIS PRODUCT. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THIS PRODUCT IS LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY.